


## CT 325 HYD

### Specifications

Code	317598	317599
Model	CT 325 HYD	
Max Thrust (kgf/lbs)	275 / 551	325 / 606
Hydraulic Power (k/w)	14	20
Propellers	Duo	Duo
Weight (kg)	24	24
A (mm)	240	
B (mm)	240	
C (mm)	240	
D (mm)	315	
E (mm)	9 to 10	

Boat Type	Boat Length (feet/meter)
Heavy Displacement High Windage & Cruising	51' - 69' / 15,5 - 21 m
Medium Displacement Medium Windage & Fast Cruising	62' - 87' / 19 - 26,5 m
Light Displacement Light Windage & Super Fast Cruising	68' - 100' / 20,7 - 30,5 m

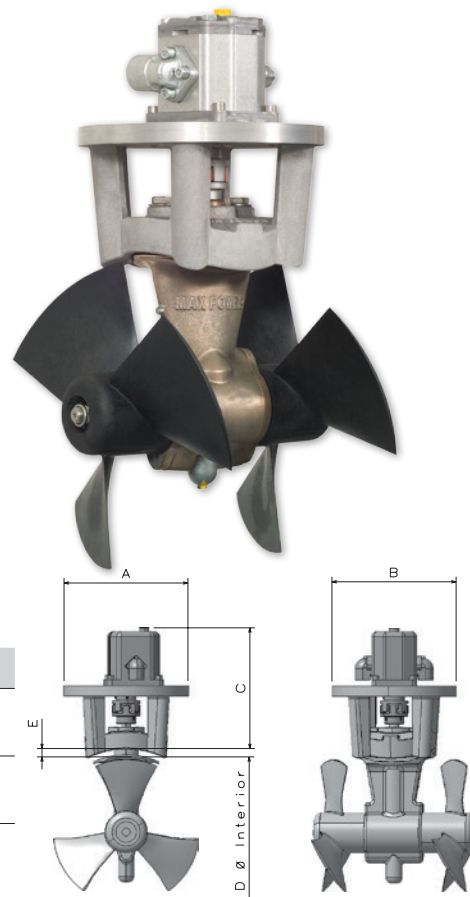

The duo propeller CT HYD 325 has a bronze (or aluminium) drive leg, and is available in 2 models the CT325/250 or the CT325/325. Currently the largest unit in the hydraulic tunnel thruster range, this model has a 315mm tunnel diameter, a thrust rating of up to 275 / 606 (kg/lbs) and integrates all the unique features of the range.

### Unique Features:



Composite drive legs



Line shields



Zero maintenance



Case hardened spiro-conical gears



Branded hydraulic components



Water resistant



Unriveted safety features

### Control Panels:

Max Power's thruster control systems include a variety of advanced safety features.

- Childproof activation
- Automatic shutdown after 30 minutes of inactivity
- Visible and audible overheat warning
- Time delay switch between port and starboard thrust
- Software protection against short circuits

